

# Setup guide



A1600 DECT 6.0  
Amplified Cordless  
Freedom Deluxe Phone



ClearSounds 1-800-965-9043

## 1 Unpack

Please see the Quick Start Guide for information about controls



Telephone handset



A1600 base station



Telephone cord



AC power adapter assembly



Three rechargeable AAA NiMH batteries




Carrying clip



Operating manual and Quick start guide. Please refer to these guides for additional instructions.

## 2 Power


### Plug in



To AC outlet

To phone jack

### Charge

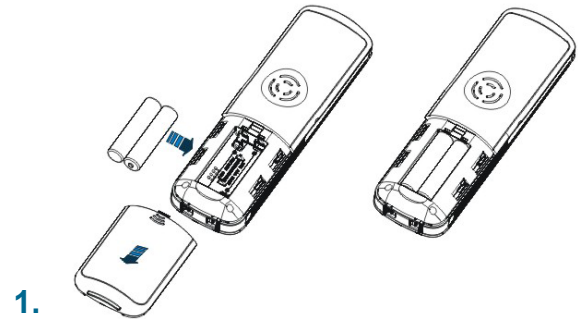




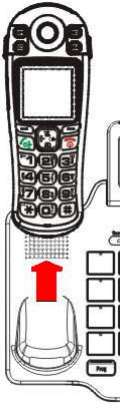


1.








2.





Prior to use, charge for 24 hours.

# 3 Call

	<b>Place</b>	<b>Answer</b>	<b>End</b>
	<ol style="list-style-type: none"> <li>Dial .</li> <li>Press .</li> </ol>	 <ol style="list-style-type: none"> <li>Lift</li> <li>Press .</li> </ol>	Press  .


	<b>Place</b>	<b>Answer</b>	<b>End</b>
	<ol style="list-style-type: none"> <li>Press .</li> <li>Dial .</li> </ol>	Press  .	Press  .

# 4 Volume

	<b>Adjust</b>	<b>Amplify</b>	<b>Maximum</b>
	 <ol style="list-style-type: none"> <li>Volume DOWN</li> <li>Volume UP</li> </ol>	 <p><b>AMP</b></p>	 <ol style="list-style-type: none"> <li>+5</li> <li>AMP</li> </ol>

	<b>Adjust</b>	Press to adjust ringer volume (or speakerphone volume during calls).
		







# 5 Messages










If you prefer to retrieve your messages by using voicemail through your telephone service provider, do not turn on the answering machine.

To retrieve your messages using the ClearSounds A1600 answering machine, take these steps. (Use the base).

## Turn on the answering machine

- Menu 
-  to TAM setup, Select 
- Select 
-  to ON, Select 

## Record your outgoing message

- Menu 
-  to TAM setup, Select 
-  to Outgoing Msg, Select 
-  to Record OGM, Select 
- After the tone, speak to record, End 